

ALU ATF aluminium profile tactile guide strip

Entrance mat of aluminium strips and various different inserts makes the ALU mat extremely effective. Ribbed, rubber or brushes - the type of entrance you have determines which inserts you need. Read more about the mat and the different inserts on each separate product.

Entrance mat with tactile guide strip ATF (*Aluminum Tactile Flooring*) with contrasting color in two different profile heights. The strip consists of 7 profiles. For best contrast, we recommend a black entrance mat with a white strip. Choose between ribbed or rubber inserts in the entrance mat, where ribbed inserts is for indoor use (zone 2-3) and rubber for covered outdoor entrances (zone 1-2). The mat is delivered in manageable pieces that are assembled with the supplied connectors. The mat is always placed on a firm and flat surface.

Environment: For out and indoor use. From low to high traffic.

Property: Effective, durable scraper mat / absorbent mat.

Material: **Textile:** Polyamide, **Rubber:** EPDM. Stainless steel, aluminium.

Thickness: 10 mm - 27 mm depending on the choice of mat and height.

Care: Vacuum, roll up, clean the well. Washing with combi scrubber dryer.

Guarantee: 3 years against production defects, does not apply to wear and tear.

Plate/strip	Profile height (mm)	Inlay	Colour	Art. no
ATF direction plate	14 mm	Ribbed	Black	914411
ATF direction plate	17 mm	Ribbed	Black	914412
ATF direction plate	22 mm	Ribbed	Black	914413
ATF guide strip	14/17 mm	Rubber	White	914221
ATF guide strip	17/22 mm	Rubber	White	914222
ATF guide strip	22/27 mm	Rubber	White	914223



Black



White

*All order dimensions are given with
W= Width x WL=Walk length x H= Height*

SCRAPER & ABSORBENT MATS





L-profile

Casting frame consists of angle profiles (L). The frame is prepared for assembly with threaded corners and pre-assembled heavy-duty corner brackets that ensure precise screwing. The frame is also equipped with swivelling clamps. Corner fittings with bracket are built 7 mm below the frame.

The frame is also available in straight lengths in the desired dimensions or with pre-drilled screw holes.

Frame (mm)	Art. no
L-profile 15x1,5	930020
L-profile 20x2	930040
L-profile 25x3	930050

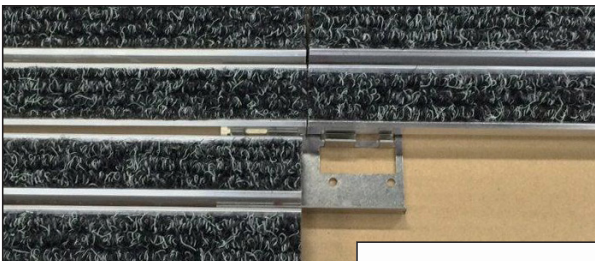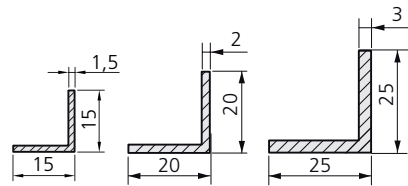

Connector that is placed in joints and joins the mat parts in the well. In the picture above, 3 mat parts are fixed in the connector.



10/17 mm



17/22 mm



22/27 mm

Daily/weekly cleaning - depending on traffic and soiling

Extra cleaning



1. Vacuuming.

TIP!

If, for example, chewing gum is stuck in the needle felt, use cooling spray on the stain to then be able to easily remove the chewing gum.



2. Remove larger particles of dirt and stones between the profiles before rolling up the carpet.



3. Roll up the mat to sweep/vacuum up dirt that has fallen between the profiles. Make sure that the well is clean and that no gravel gets under the profiles when the mat is rolled back. This will damage the profiles when they are loaded from above.



1. Carry out 'daily cleaning' first.

2. Followed by carpet cleaning, e.g. with a Kärcher BR 30/4 C Advance scrubber-dryer.